

# INSTRUCTION

## Exchange of Membrane TISSCO TAP


1. Disconnect Keg



2. Open the tap(s) to release pressure in the system.



3. Unscrew the handle...

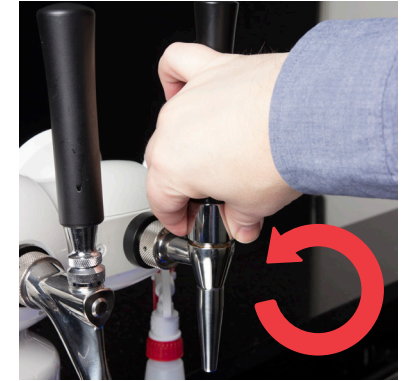

...and lift it out from the tap



4. Remove the old membrane



5. Old membrane removed




6. Install a new membrane



7. Make sure the new membrane is securely in place



8. Refit the handle

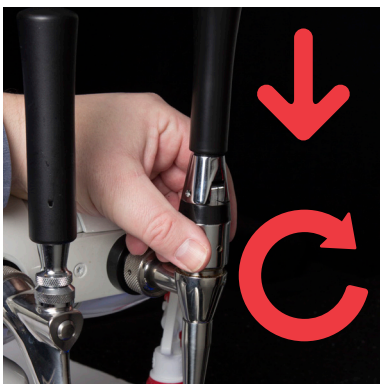

9. Connect the keg



10. Check for leaks. Done

